



SSP

Safety System Products

S14LDRB-H10-Q1A0-Q2A0-Q3A0-Q4A0

Safety Simplifier | S14 control cabinet unit

Your advantages

- 14 I/O's as safety Inputs or redundant OSSD-Outputs
- wireless Interface for safe communication, programming & diagnosis
- IP65
- 40mm width for aluminium safety fence systems



[To the downloads ►](#)

we simplify safety



Safety System Products

S14LDRB-H10-Q1A0-Q2A0-Q3A0-Q4A0

With the Safety Simplifier we take safety where it is needed and we provide safety where it is needed with the Safety Simplifier and make it easier for you to develop user-friendly safety systems, such as on access doors. Simply connect up your sensors, locking systems or light curtains. Select the required push button and/or emergency stop button and you have a complete safety solution with analysis and diagnosis functions. This data is wirelessly transmitted via another Safety Simplifier or directly transmitted to your existing system in a fail-safe manner.

General data

| | |
|------------------|---|
| Type designation | S14LDRB-H10-Q1A0-Q2A0-Q3A0-Q4A0 |
| Item number | SP-X-89-000-04 |
| Functional type | Safety PLC with safe wireless interface, internal antenna |

Safety data

CPU

| | |
|----------------------------------|------------|
| - EN ISO 13849-1: 2008 | Category 4 |
| - IEC 61508-2 | SIL CL 3 |
| - EN 62061 PFHD [1/h] | □ |
| - EN ISO 13849-1: 2008 TM [Year] | 20 |

1-channel input

| | |
|----------------------------------|------------|
| - EN ISO 13849-1: 2008 | Category 2 |
| - IEC 61508-2 | SIL CL 2 |
| - EN 62061 PFHD [1/h] | □ |
| - EN ISO 13849-1: 2008 TM [Year] | 20 |

2-channel input

| | |
|----------------------------------|------------|
| - EN ISO 13849-1: 2008 | Category 4 |
| - IEC 61508-2 | SIL CL 2 |
| - EN 62061 PFHD [1/h] | □ |
| - EN ISO 13849-1: 2008 TM [Year] | 20 |

1-channel OSSD output

| | |
|------------------------|------------|
| - EN ISO 13849-1: 2008 | Category 2 |
| - IEC 61508-2 | SIL CL 2 |



Safety System Products

S14LDRB-H10-Q1A0-Q2A0-Q3A0-Q4A0

| | |
|----------------------------------|----|
| - EN 62061 PFHD [1/h] | □ |
| - EN ISO 13849-1: 2008 TM [Year] | 20 |

2- channel OSSD Output

| | |
|----------------------------------|------------|
| - EN ISO 13849-1: 2008 | Category 4 |
| - IEC 61508-2 | SIL CL 3 |
| - EN 62061 PFHD [1/h] | □ |
| - EN ISO 13849-1: 2008 TM [Year] | 20 |

2- channel relais output

| | |
|----------------------------------|------------|
| - EN ISO 13849-1: 2008 | Category 4 |
| - EN 62061 SIL CIL | SIL CL 3 |
| - EN 62061 PFHD [1/h] | □ |
| - EN ISO 13849-1: 2008 TM [Year] | 20 |

| | |
|-----------|---------|
| Approvals | CE, TÜV |
|-----------|---------|

Environmental conditions

| | |
|----------------------------|-------------------|
| Max. storage temperature | -20 °C ... +65 °C |
| Max. operating temperature | -20 °C ... +65 °C |

Electrical data

Technical data wireless safety

| | |
|---|----|
| - max. amount of safe wireless channels | 16 |
|---|----|

Channels

| | |
|--------------|----------|
| - Channel 1 | 2405 MHz |
| - Channel 2 | 2410 MHz |
| - Channel 3 | 2415 MHz |
| - Channel 4 | 2420 MHz |
| - Channel 5 | 2425 MHz |
| - Channel 6 | 2430 MHz |
| - Channel 7 | 2435 MHz |
| - Channel 8 | 2440 MHz |
| - Channel 9 | 2445 MHz |
| - Channel 11 | 2455 MHz |
| - Channel 10 | 2450 MHz |

S14LDRB-H10-Q1A0-Q2A0-Q3A0-Q4A0

| | |
|--|---|
| - Channel 12 | 2460 MHz |
| - Channel 13 | 2465 MHz |
| - Channel 14 | 2470 MHz |
| - Channel 15 | 2475 MHz |
| - Channel 16 | 2480 MHz |
| - amount of clamps | 32 |
| Supply voltage | 10 - 30 V |
| Current consumption | 110 mA with LED display |
| Conductor cross section | |
| - single wire | 0,08 ... 0,5 mm ² |
| - fine wire | 0,08 ... 0,5 mm ² |
| - fine wired (wire sleeve without plastic collar) | 0,25 mm ² |
| stripping length | 5-6 mm |
| configurable In-/ Outputs | |
| 14 semiconductor In-/ Outputs with help of software configurable | □ |
| Amount of safe inputs | max. 14 |
| Amount of safe semi-conductors OSSD outputs | max. 14 |
| Amount of semi-conductors auxilliary outputs | max. 14 |
| Amount of semi-conductors clock outputs | max. 14 |
| Input current | HIGH 2,4 mA ... 3,8 mA LOW -2,5 mA ... 2,1 mA |
| Output type | PNP- semiconductor |
| Output voltage | Operating voltage UB -0,5 V |
| Seperate output current | max. 600 mA (with UB 24 V) |
| Total output current | max. 2 A (with UB 24 V) |
| General data | |
| Memory card | Installation of a memory card MEM-SP-N-88-001-93 possible |
| Programming connection | Micro USB, Wireless Interface |
| Type terminal connection | clamp terminals |
| - fine wired (wire sleeve with plastic collar) | 0,08 ... 0,5 mm ² |
| Input voltage | HIGH 75% of UB (adaptable with software) LOW 25% of UB (adaptable with Software) |

S14LDRB-H10-Q1A0-Q2A0-Q3A0-Q4A0

Technical data safe OSSD outputs, auxilliary and test pulse outputs

Short-circuit proof Yes

Mechanical data

Installation opening of buttons 22,5 mm

Dimensions


Height 44 mm

Length 253 mm

Width 42 mm

Electrical drawings

Connection example 1

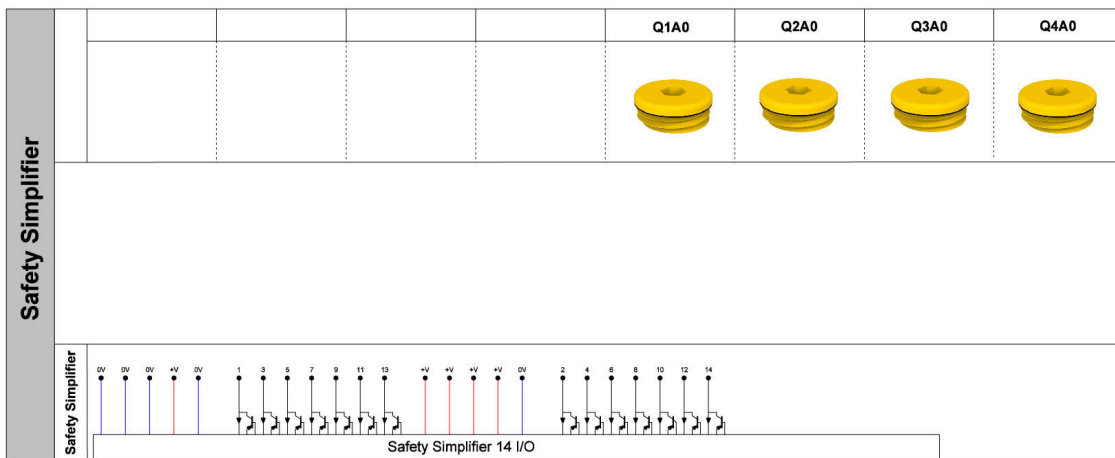

Equipment

Accessories

M12-female connector, 5-pin

M12-C51-G



SP-X-33-001-00









S14LDRB-H10-Q1A0-Q2A0-Q3A0-Q4A0

| | | | |
|------------------------------------|-----------------|----------------|---|
| M12-male connector, 5 pin | M12-C52-G | SP-X-33-001-01 |  |
| M12-female connector, 8 pin | M12-C81-G | SP-X-33-001-02 |  |
| M12-male connector, 8 pin | M12-C82-G | SP-X-33-001-03 |  |
| M12-connecting cable, 12 pin, 1 m | M12-M12-C1213-G | SP-X-33-000-30 |  |
| M12-connecting cable, 5 pin, 0,5 m | M12-M12-C5023-G | SP-X-33-000-10 |  |
| M12-connecting cable, 5 pin, 1 m | M12-M12-C513-G | SP-X-33-000-11 |  |
| M12-connecting cable, 5 pin, 2 m | M12-M12-C523-G | SP-X-33-000-12 |  |
| M12-connecting cable, 8 pin, 10 m | M12-M12-C8103-G | SP-X-33-000-09 |  |

S14LDRB-H10-Q1A0-Q2A0-Q3A0-Q4A0

| | | | |
|----------------------------------|----------------|----------------|---|
| M12-connecting cable, 8 pin, 1 m | M12-M12-C813-G | SP-X-33-000-25 |  |
| M12-connecting cable, 8 pin, 5 m | M12-M12-C853-G | SP-X-33-000-08 |  |

Wireless Safety

| | | | |
|--|----------------------|----------------|---|
| Article code ZMB | Mounting plate big | SP-N-88-850-02 |  |
| Article code ZMS | Mountingplate small | SP-N-88-850-01 |  |
| Article code ZSD | Screw with seal | SP-X-88-001-89 |  |
| External antenna for Safety Simplifier, cable length 1 m | Simplifier EXTA 1 m | SP-X-88-200-24 |  |
| External antenna for Safety Simplifier, cable length 10 m | Simplifier EXTA 10 m | SP-X-88-200-20 |  |
| External antenna for Safety Simplifier, cable length 2 m | Simplifier EXTA 2 m | SP-X-88-200-23 |  |

S14LDRB-H10-Q1A0-Q2A0-Q3A0-Q4A0

External antenna for Safety Simplifier, cable length

5 m

Simplifier EXTA 5 m

SP-X-88-200-22



External antenna for Safety Simplifier, cable length

8 m

Simplifier EXTA 8 m

SP-X-88-200-21



Free software for the Safety Simplifier System

Simplifier Manager



Simplifier Monitor SRM

SP-N-88-850-03



Fastening set for Safety Simplifier for back panel

mounting

Simplifier ZHMS

SP-X-88-001-91



Fastening set for Safety Simplifier

Simplifier ZHS

SP-X-88-001-91



Operating elements

Universal hook

SP UH-K





Safety System Products

S14LDRB-H10-Q1A0-Q2A0-Q3A0-Q4A0

Downloads

- Certificates
- STEP
- Catalog
- Product line
- Certificates
- Catalog packaging systems
- Operating manual
- EPLAN-Data