



SSP

Safety System Products

S14LDRB-H0A-E2-I1-I1-K3-Q1A0-Q2A0-Q3C0-Q4X0-W46

Safety Simplifier | for SAFEGATE

Your advantages

- 14 I/O's as safety Inputs or redundant OSSD-Outputs
- wireless Interface for safe communication, programming & diagnosis
- IP65
- 40mm width for aluminium safety fence systems



To the downloads ►

we simplify safety



Safety System Products

S14LDRB-H0A-E2-I1-I1-K3-Q1A0-Q2A0-Q3C0-Q4X0-W46

With the Safety Simplifier we take safety where it is needed and we provide safety where it is needed with the Safety Simplifier and make it easier for you to develop user-friendly safety systems, such as on access doors. Simply connect up your sensors, locking systems or light curtains. Select the required push button and/or emergency stop button and you have a complete safety solution with analysis and diagnosis functions. This data is wirelessly transmitted via another Safety Simplifier or directly transmitted to your existing system in a fail-safe manner.

General data

Type designation	S14LDRB-H0A-E2-I1-I1-K3-Q1A0-Q2A0-Q3C0-Q4X0-W46
Item number	SP-X-89-100-15
Functional type	safety PLC with safe wireless interface, internal antenna

Button position 1

Function type	Emergency-Stop-Button
---------------	-----------------------

Button position 2

Type designation	I1
Function type	Illuminated Button

Button position 3

Type designation	I1
Function type	Illuminated Button

Button position 4

Type designation	K3
Function type	Key switch 2 positions, 2 x NO
Colour	red, yellow, green, blue, white

Connection

- Position 2	Q2A0 - Connection top left with cover
- Position 3	Q3C0- connection bottom right side including male plug M12-5 Pin
- Position 4	Q4X0 - connection top right side including socket plug M12 12-pin

Safety data

CPU

we simplify safety



Safety System Products

S14LDRB-H0A-E2-I1-I1-K3-Q1A0-Q2A0-Q3C0-Q4X0-W46

- EN ISO 13849-1: 2008	Category 4
- IEC 61508-2	SIL CL 3
- EN 62061 PFHD [1/h]	□
- EN ISO 13849-1: 2008 TM [Year]	20
1-channel input	
- EN ISO 13849-1: 2008	Category 2
- IEC 61508-2	SIL CL 2
- EN 62061 PFHD [1/h]	□
- EN ISO 13849-1: 2008 TM [Year]	20
2-channel input	
- EN ISO 13849-1: 2008	Category 4
- IEC 61508-2	SIL CL 3
- EN 62061 PFHD [1/h]	□
- EN ISO 13849-1: 2008 TM [Year]	20
1-channel OSSD output	
- EN ISO 13849-1: 2008	Category 2
- IEC 61508-2	SIL CL 2
- EN 62061 PFHD [1/h]	□
- EN ISO 13849-1: 2008 TM [Year]	20
2- channel OSSD Output	
- EN ISO 13849-1: 2008	Category 4
- IEC 61508-2	SIL CL 3
- EN 62061 PFHD [1/h]	□
- EN ISO 13849-1: 2008 TM [Year]	20
2- channel relais output	
- EN ISO 13849-1: 2008	Category 4
- EN 62061 SIL CIL	SIL CL 3
- EN 62061 PFHD [1/h]	□
- EN ISO 13849-1: 2008 TM [Year]	20
Approvals	CE, TÜV
Environmental conditions	
Max. storage temperature	-20 °C ... +65 °C



Safety System Products

S14LDRB-H0A-E2-I1-I1-K3-Q1A0-Q2A0-Q3C0-Q4X0-W46

Max. operating temperature -20 °C ... +65 °C

Electrical data

Technical data wireless safety

- max. amount of safe wireless channels 16

Channels

- Channel 1 2405 MHz

- Channel 2 2410 MHz

- Channel 3 2410 MHz

- Channel 4 2420 MHz

- Channel 5 2425 MHz

- Channel 6 2430 MHz

- Channel 7 2435 MHz

- Channel 8 2440 MHz

- Channel 9 2445 MHz

- Channel 11 2455 MHz

- Channel 10 2450 MHz

- Channel 12 2460 MHz

- Channel 13 2465 MHz

- Channel 14 2470 MHz

- Channel 15 2475 MHz

- Channel 16 2480 MHz

- amount of clamps 32

Supply voltage 10 - 30 V

Current consumption 110 mA with LED display

Conductor cross section

- single wire 0,08 ... 0,5 mm²

- fine wire 0,08 ... 0,5 mm²

- fine wired (wire sleeve without plastic collar) 0,25 mm²

stripping length 5-6 mm

configurable In-/ Outputs

14 semiconductor In-/ Outputs with help of software configurable □



Safety System Products

S14LDRB-H0A-E2-I1-I1-K3-Q1A0-Q2A0-Q3C0-Q4X0-W46

Amount of safe inputs	max. 14
Amount of safe semi-conductors OSSD outputs	max. 14
Amount of semi-conductors auxilliary outputs	max. 14
Amount of semi-conductors clock outputs	max. 8
Input current	HIGH 2,4 mA ... 3,8 mA LOW -2,5 mA ... 2,1 mA
Output type	PNP- Semiconductor
Output voltage	Operation voltage UB -0,5 V
Seperate output current	max. 600 mA (bei UB 24 V)
Total output current	max. 2 A (bei UB 24 V)
Button position 1	
Type designation	E2
Function type	Emergency- Stop- Button
Switch type	2 Openers + LED
Bounce time NO	<10 ms
Bounce time NC	<10 ms
Break contact force opening	according to EN60947-5-1 Anh-K
Illumination	LED
mechanical lifespan	50.000 switching cycles
electrical lifespan	50.000 switching cycles
B10d- Value	250.000
Button position 2	
Type designation	I1
Function type	Illuminated Button
Switch type	1 closing device + LED
Bounce time NO	<10 ms
Bounce time NC	<10 ms
Break contact force opening	according to EN60947-5-1 Anh-K
Illumination	LED
mechanical lifespan	30.000 switching cycles
electrical lifespan	30.000 switching cycles
Button position 3	
Type designation	I1
Function type	Illuminated Button



Safety System Products

S14LDRB-H0A-E2-I1-I1-K3-Q1A0-Q2A0-Q3C0-Q4X0-W46

Colour	red, yellow, green, blue, white
Switch type	1 closing device + LED
Bounce time NO	<10 ms
Bounce time NC	<10 ms
Break contact force opening	according to EN60947-5-1 Anh-K
Illumination	LED
mechanical lifespan	30.000 switching cycles
electrical lifespan	30.000 switching cycles
Button position 4	
Type designation	K3
Function type	Key switch 2 positions, latching, individual label
Colour	red, yellow, green, blue, white
Switch type	2 closing devices
Bounce time NO	<10 ms
Bounce time NC	<10 ms
Break contact force opening	according to EN60947-5-1 Anh-K
Illumination	LED
mechanical lifespan	1.000.000 switching cycles
electrical lifespan	1.000.000 switching cycles
General data	
Memory card	Installation of a memory card MEM-SP-N-88-001-93 possible
Programming connection	micro USB
Type terminal connection	clamp terminals
- fine wired (wire sleeve with plastic collar)	0,08 ... 0,5 mm ²
Input voltage	HIGH 75% from UB (adjustable by software) LOW 25% from UB (adjustable by software)
Technical data inputs	
Technical data safe OSSD outputs, auxilliary and test pulse outputs	
Short-circuit proof	Yes
Mechanical data	
Installation opening of buttons	22,5 mm

S14LDRB-H0A-E2-I1-I1-K3-Q1A0-Q2A0-Q3C0-Q4X0-W46


Type of housing H0A

Dimensions

Height 44 mm
 Length 253 mm
 Width 42 mm

Electrical drawings


Connection example 1

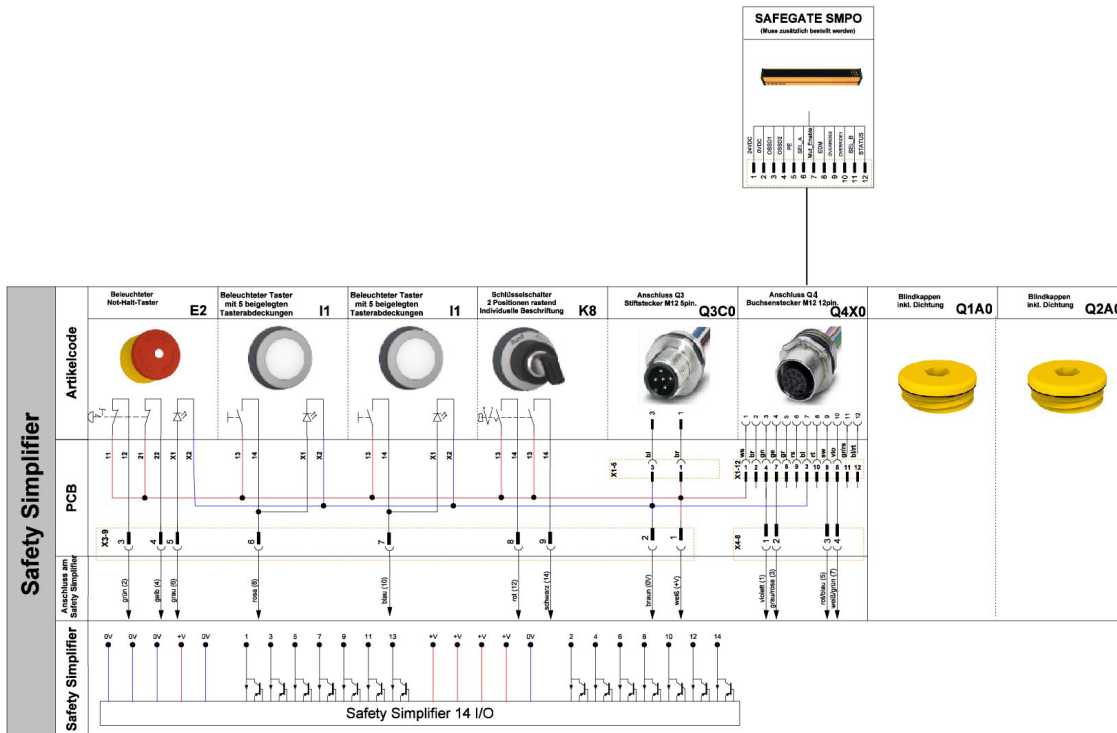

S14LDRB-H0A-E2-I1-I1-K3-Q1A0-Q2A0-Q3C0-Q4X0-W46

Drawings


Assembly

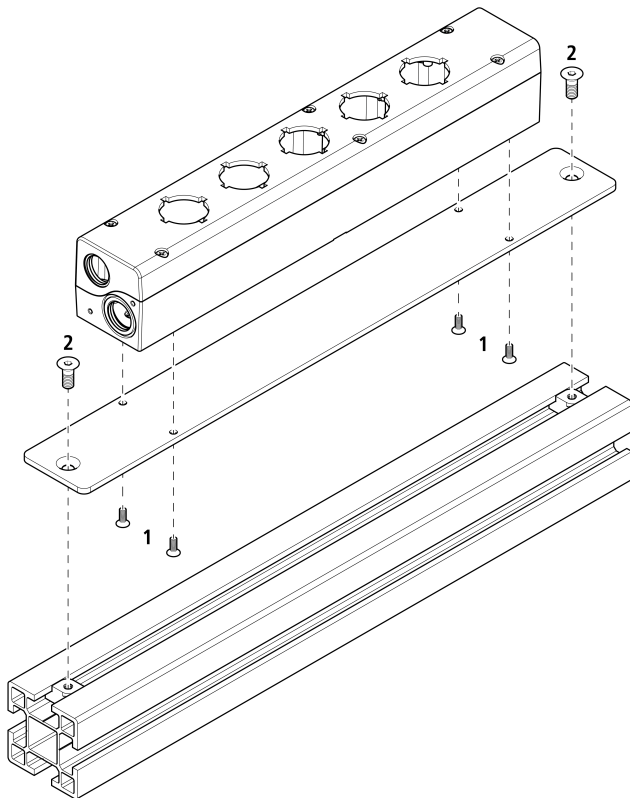

- 1.) Gehäuse über den dafür vorgesehenen Bohrungen positionieren und mit den vier mitgelieferten M3 Senkkopfschrauben auf der Montageplatte befestigen.
- 2.) Montageplatte mit zwei M5 Senkkopfschrauben (nicht im Lieferumfang enthalten) zum Beispiel auf einer Profilschiene befestigen.


S14LDRB-H0A-E2-I1-I1-K3-Q1A0-Q2A0-Q3C0-Q4X0-W46

Assembly 2

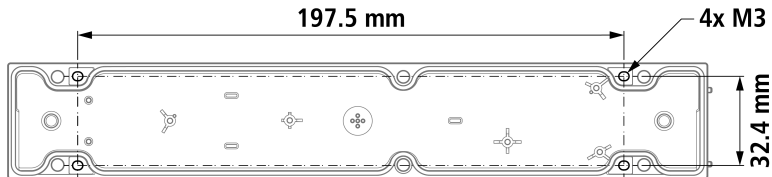

Befestigungsvariante 1:

Von aussen, mit vier M3 Schrauben an den dafür vorgesehenen Langlöchern.

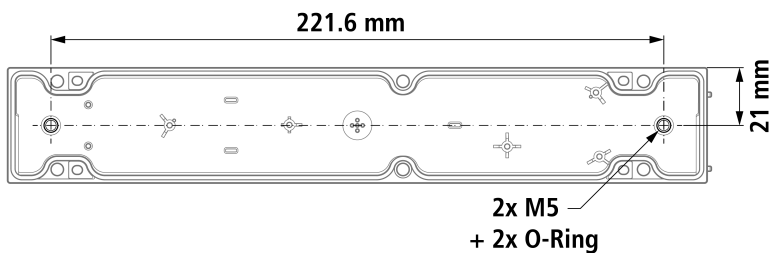


Befestigungsvariante 2:

Im Gehäuseinnern, mit zwei mit O-Ringen bestückten M5 Schrauben an beiden Enden des Gehäuses. Die Öffnungen für die beiden M5 Schrauben müssen dabei herausgebrochen werden.

S14LDRB-H0A-E2-I1-I1-K3-Q1A0-Q2A0-Q3C0-Q4X0-W46

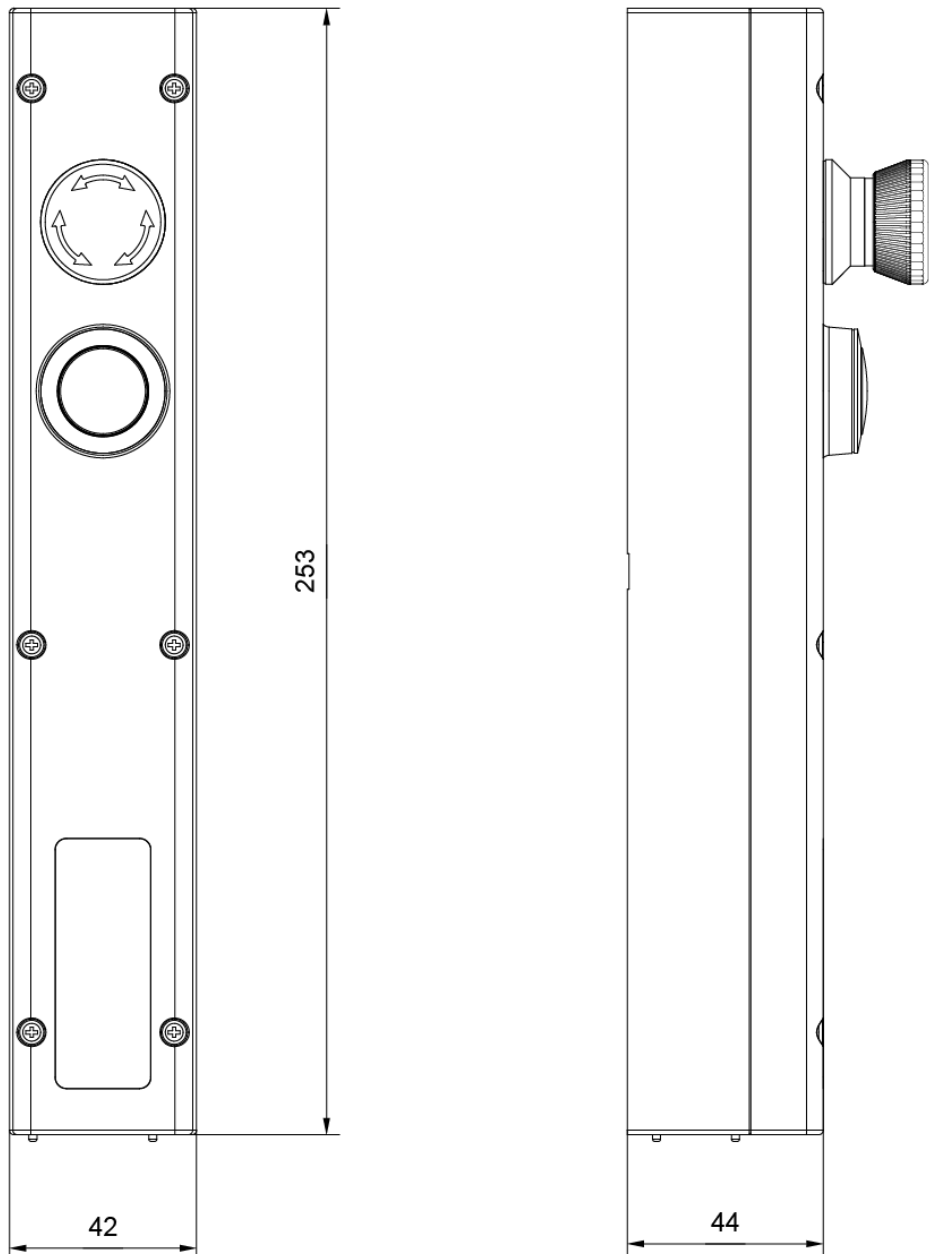






Dimensions











Equipment

Wireless Safety









S14LDRB-H0A-E2-I1-I1-K3-Q1A0-Q2A0-Q3C0-Q4X0-W46

Article code ZTK5	Button cap set for illuminated buttons	SP-X-88-001-19	
	Inscription label set ZB1	SP-X-88-001-21	
	Inscription label set ZB2	SP-X-88-001-22	
	Inscription label set ZB3	SP-X-88-001-23	
	Inscription label set ZB4	SP-X-88-001-93	
Article code ZMT	Installation wrench	SP-X-88-001-25	
Article code ZUK	Liftingtool for button and light caps	SP-X-88-001-26	

S14LDRB-H0A-E2-I1-I1-K3-Q1A0-Q2A0-Q3C0-Q4X0-W46

Article code ZMB	Mounting plate big	SP-N-88-850-02	
Article code ZMS	Mountingplate small	SP-N-88-850-01	
Article code ZSD	Screw with seal	SP-X-88-001-89	
External antenna for Safety Simplifier, cable length 1 m	Simplifier EXTA 1 m	SP-X-88-200-24	
External antenna for Safety Simplifier, cable length 10 m	Simplifier EXTA 10 m	SP-X-88-200-20	
External antenna for Safety Simplifier, cable length 2 m	Simplifier EXTA 2 m	SP-X-88-200-23	
External antenna for Safety Simplifier, cable length 5 m	Simplifier EXTA 5 m	SP-X-88-200-22	
External antenna for Safety Simplifier, cable length 8 m	Simplifier EXTA 8 m	SP-X-88-200-21	

S14LDRB-H0A-E2-I1-I1-K3-Q1A0-Q2A0-Q3C0-Q4X0-W46

Free software for the Safety Simplifier System	Simplifier Manager		
	Simplifier Monitor SRM	SP-N-88-850-03	
Fastening set for Safety Simplifier for back panel mounting	Simplifier ZHMS	SP-X-88-001-91	
Fastening set for Safety Simplifier	Simplifier ZHS	SP-X-88-001-91	
Accessories			
M12-female connector, 12 pin, 10 m	M12-C12101-G	SP-X-33-000-21	
M12-female connector, 12 pin, 20 m	M12-C12201-G	SP-X-33-000-22	
M12-female connector, 5-pin	M12-C51-G	SP-X-33-001-00	
M12-male connector, 5 pin	M12-C52-G	SP-X-33-001-01	

S14LDRB-H0A-E2-I1-I1-K3-Q1A0-Q2A0-Q3C0-Q4X0-W46

M12-female connector, 8 pin

M12-C81-G

SP-X-33-001-02



M12-male connector, 8 pin

M12-C82-G

SP-X-33-001-03



M12-connecting cable, 12 pin, 1 m

M12-M12-C1213-G

SP-X-33-000-30



M12-connecting cable, 5 pin, 0,5 m

M12-M12-C5023-G

SP-X-33-000-10



M12-connecting cable, 5 pin, 1 m

M12-M12-C513-G

SP-X-33-000-11



M12-connecting cable, 5 pin, 2 m

M12-M12-C523-G

SP-X-33-000-12



M12-connecting cable, 8 pin, 10 m

M12-M12-C8103-G

SP-X-33-000-09



M12-connecting cable, 8 pin, 1 m

M12-M12-C813-G

SP-X-33-000-25



Operating elements



Safety System Products

S14LDRB-H0A-E2-I1-I1-K3-Q1A0-Q2A0-Q3C0-Q4X0-W46

Universal hook

SP UH-K



Safety switches

Safety switch with locking function

THM-SMDU-QM

ITM-00159181



Downloads

- Certificates
- STEP
- Catalog
- Product line
- Certificates
- Catalog packaging systems
- Operating manual
- EPLAN-Data

we simplify safety